


LP Platform Scale

1200mm x 1200mm

Heavy-duty 1200mm x 1200mm platform scale in mild steel with mains and rechargeable battery operation.

Capacities available from 1000kg to 5000kg with a 1200mm x 1200mm plate size.

- Heavy-duty Mild Steel Platform Scale
- 1200mm x 1200mm Chequer plate base
- From 1000kg to 5000kg capacities
- Mains operated with rechargeable battery
- Just 65mm height

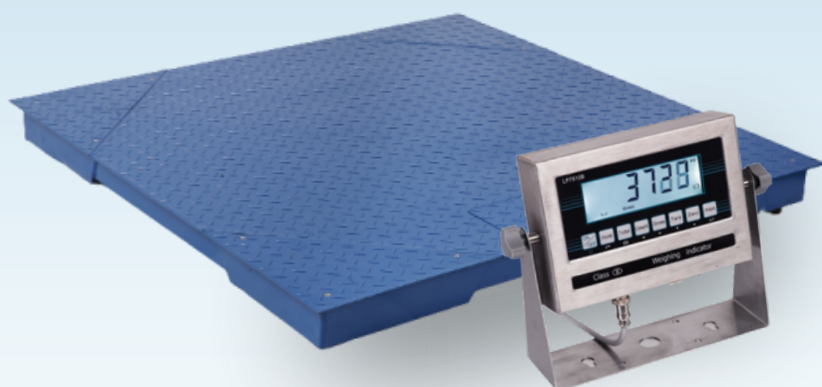

Our LP7510 mild steel indicator is included as standard and includes:

Model	LP7510	LP7510 Stainless Steel Upgrade	LP7510 Range - stainless steel with Integrated Printer	4-20 mA Indicator with Relay
Tray Size (L*W)	LED 6-digits, 0.8", plus 13 status indicator.	6-digits, 0.8", plus 13 status indicators.	-digits, 0.8", plus 13 status indicators.	6-digits, 0.8", plus 13 status indicators.
Keyboard	7 double functions, flexible membrane.	7 double functions, flexible membrane.	7 double functions, flexible membrane.	7 double functions, flexible membrane.
Housing	Mild Steel IP65.	Stainless Steel IP65.	Stainless Steel IP65.	Mild Steel IP65.
Mounting	Desk-top, Wall, Column, Adjustable Angle	Desk-top, wall, column, adjustable angle.	desk-top, wall, column, adjustable angle.	desk-top, wall, column, adjustable angle.
Functions:	Zero, gross, net, accumulating, printing. Counting, classifying, check to weigh, animal-scale.	Zero, gross, net, accumulating, printing. Counting, classifying, check to weigh, animal-scale.	Zero, gross, net, accumulating, printing. Counting, classifying, check to weigh, animal-scale. Tally Roll integrated printer.	Zero, gross, net, accumulating, printing. Counting, classifying, check to weigh, animal-scale.
Display	kg	kg - 10 times higher resolution.	kg - 10 times higher resolution.	kg - 10 times higher resolution.
Power:	110/220VAC(-15%~+10%),50/60Hz.	110/220VAC(-15%~+10%),50/60Hz.	110/220VAC(-15%~+10%),50/60Hz.	110/220VAC(-15%~+10%),50/60Hz.